

PEARLWEAVE® SAFETY NETTING



ELEVATOR CONSTRUCTION SAFETY NETTING

✓ The PearlWeave® Solution

PearlWeave Safety Netting Corp. has serviced the requirements of the safety market since 1934. PearlWeave's fall protection and debris containment systems facilitate compliance with OSHA regulations. Call PearlWeave today and let us design a solution to your compliance and safety concerns.

■ Hoistway Screening

OSHA requires the installation of screening between adjacent elevator hoistways, to protect workers from injury.

The National Elevator Industry's Field Employee Safety Handbook, Section 8.3, "Hoistway Screening," requires that, "when an elevator is operating in a multiple hoistway, and construction or modernization work is to be performed in an adjacent position of that multiple hoistway, that portion of the elevator's hoistway, where the work is to be performed, shall be fully separated."

PearlWeave netting, when installed vertically inside elevator hoistways, provides the equivalent protection to that of wire mesh. It replaces screening behind traveling cables, protects counterweight frames, and most importantly, protects workers, working inside of one hoistway, from "straying into" the adjacent hoistway or area between counterweight rails, thereby preventing serious injury, and, even loss of life.

■ Guardrail System


OSHA Subpart M requires guardrail and toeboard systems on all open-sided floors, platforms, holes, and work areas.

PearlWeave Safety Netting's accepted guardrail/toeboard system is designed to provide protection in excess of these standards. When properly installed from required top-rail, and, secured directly to deck level, PearlWeave satisfies OSHA requirements for mid-rail and toeboard protection.

Colors	Stock Sizes	Mesh Size	Weight Per Roll	Lateral Force	Breaking Strength	Bursting Strength
Premium Grade						
Fluorescent Orange	48" x 150'	3/16"	26lbs	540 lbs	80lbs/in	125psi
	66" x 150'	3/16"	35lbs	540 lbs	80lbs/in	125psi
Black	102" x 150'	1/8"	62lbs	N/A	95lbs/in	150psi
Standard Grade						
Fluorescent Red	48" x 150'	3/16"	15lbs	250 lbs	Warp: 40 lbs/in	60 psi
	66" x 150'	3/16"	20lbs	250 lbs	Fill: 45 lbs/in	
Black	102" x 150'	3/16"	30lbs	N/A		

Note: Above information is offered for your general guidance and has been obtained by modern test methods. They are typical test values and do not represent specifications of the products.

PearlWeave Safety Netting Corp. offers safety netting systems for all construction, industrial, maritime, and recreational applications. Please call for samples and additional information on products not found in this brochure.

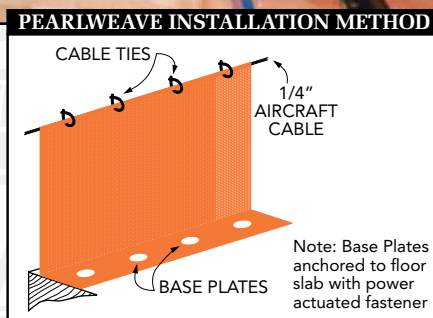

Isn't It Time You Tried PearlWeave?

For years, the elevator industry has been using "chicken wire," "hardware cloth" and other gauge wire to comply with national, local and industry safety standards.

PearlWeave's safety netting products are light-weight, durable and easier to use than traditional wire meshes, while exceeding their strength characteristics. Our chemical and mildew resistant products, are also flame retardant, and, if burned, will not emit toxins into the hoistway.

Let PearlWeave elevator construction safety netting systems facilitate your compliance requirements in the easiest and most cost effective manner!

Contact Us Today...

PearlWeave Safety Netting Corp.

606 West 131 Street, New York, NY 10027 USA

Phone (212) 283-0505 • Toll Free (800) 732-7566 • Fax (212) 862-8951

VISIT OUR WEBSITE AT <http://www.pearlweave.com>

Disclaimer: Purchaser/user is solely responsible for the proper installation and "on the job" testing as may be required by local, state or federal regulation. The system must be inspected personally by a qualified person. Since conditions of use are beyond our control, PearlWeave Safety Netting Corp. disclaims responsibility for results.

©PearlWeave Safety Netting Corp., 2004

©PearlWeave is a registered trademark of Pearlgreen Corporation